


• ETIBREAK

MOULDED CASE CIRCUIT BREAKERS

NIZKONAPETOSTNI KOMPAKTNI ODKLOPNIK

NISKONAPONSKI KOMPAKTNI PREKIDAČ

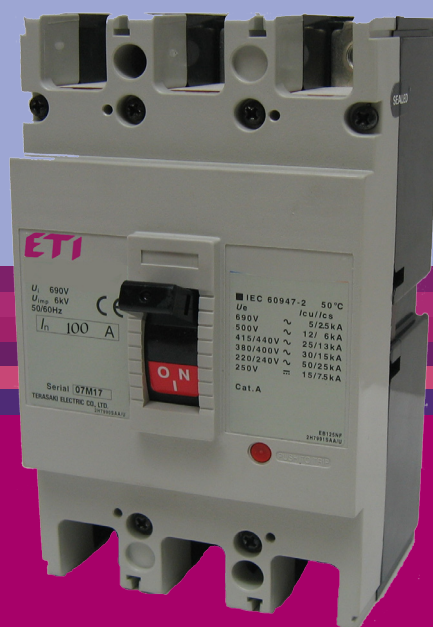

New, Novo!

ETI

Power needs control

Economic MCCB 100AF

thermal magnetic release
lower short circuit breaking capacity
small dimension
fixed adjustments

Ekonomik kompaktni odklopnik velikosti ohišja 100A

termo magnetni sprožnik
nižje izklopne kratko-stične zmogljivosti
male dimenzije
fiksne nastavitve

Ekonomik kompaktni prekidač veličine kućišta 100A

termo magnetski okidač
niže isklonpe kratko sponje mogućnosti
male dimenzije
fiksna podešavanja

ETIBREAK EB 100AF


Type, Tip	I_N	Code No. Šifra	poles, polova	I_{cu} lcs	adjustment, nastavljanje, podešavanje	weight, teža, težina [kg]	packaging, pakiranje [pcs]
EB 100/3L 16A 3p	16	004620011	3	16/8	fix/fix	0,74	1
EB 100/3L 20A 3p	20	004620012	3	16/8	fix/fix	0,74	1
EB 100/3L 25A 3p	25	004620013	3	16/8	fix/fix	0,74	1
EB 100/3L 32A 3p	32	004620014	3	16/8	fix/fix	0,74	1
EB 100/3L 40A 3p	40	004620015	3	16/8	fix/fix	0,74	1
EB 100/3L 50A 3p	50	004620016	3	16/8	fix/fix	0,74	1
EB 100/3L 63A 3p	63	004620017	3	16/8	fix/fix	0,74	1
EB 100/3L 80A 3p	80	004620018	3	16/8	fix/fix	0,74	1
EB 100/3L 100 3p	100	004620019	3	16/8	fix/fix	0,74	1
ED100/3	100	004620020	3			0,74	1

NOMINAL CURRENT RATINGS

	I_N	(A)	50°C	16,20,25,32,40,50, 63,80,100
ELECTRICAL CHARACTERISTICS				
Rated operational voltage	U_c	(V)	AC 50/60 HZ DC	550 260
Rated insulation voltage	U_i	(V)		660
Rated impulse withstand voltage	U_{imp}	(kV)		6
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I_{cu}	(kA)	690V AC 525V AC 440V AC 400/415V AC 220/240V AC 250V DC	- 7,5 10 16 25 7,5
Service breaking capacity (IEC, JIS, AS/NZS)	I_{cs}	(kA)	690V AC 525V AC 440V AC 400/415V AC 220/240V AC 250V DC	- 3,8 5 8 13 3,8
Rated breaking capacity (NEMA)		(kA)	480V AC 240VAC	7,5 25
PROTECTION				
Adjustable thermal, adjustable magnetic				■
Utilisation category				A
INSTALLATION				
Front connection				■
Dimensions	H	(mm)		130
	W	(mm)		75
	D	(mm)		68
Weight	W	(kg)		0,74
OPERATION				
Direct Opening Action				-
Toggle operation				■
Endurance		440V	mechanical electrical	5000 10000

Time/current characteristic curves

EP100-NF

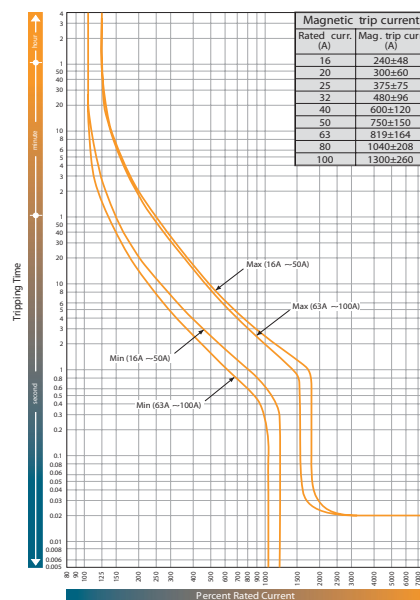

Ambient compensating curves

